



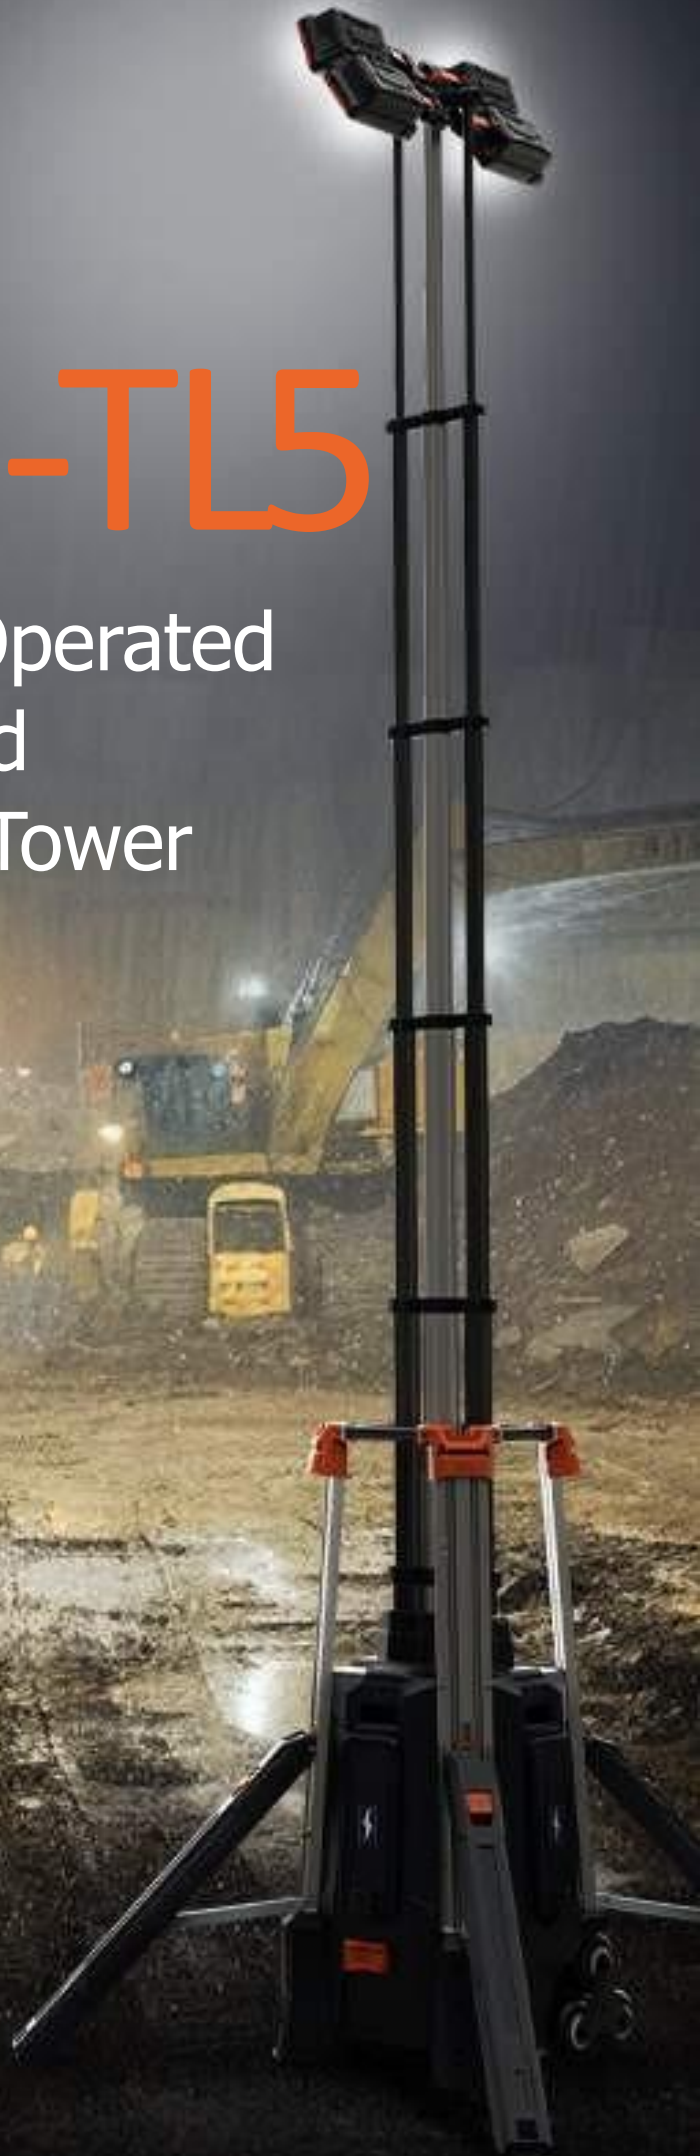

MERLIN[®]

MLGC-TL5

Single-Person Operated
Battery Powered
Portal Lighting Tower

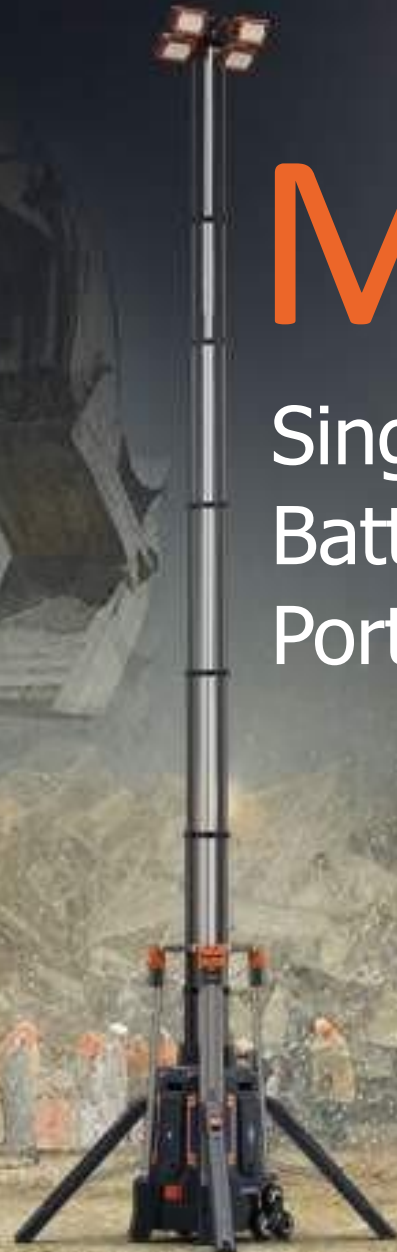

MERLIN EQUIPMENT PTE LTD

69B Tuas Bay Drive, Singapore 636827

Tel: +65 6863 1753

Email: sales@merlinequip.com

ZERO

NOISE
EMISSIONS
FUEL CONSUMPTION



0dB Quiet Operation



50Kg-Class Single-Person Rapid Deployment



0 Diesel Cost



Triple Wheel + Self-Locking Leg Adapts To All Terrains



0 Carbon Emissions



IP65 Weatherproof Wind Resistance Level 8



0 Maintenance Cost



Lithium Battery Powered Versatile For Various Sites



0 Trailer Cost



Fully Rotatable Head & Adjustable Beam Angle For Versatile Lighting Area

MLGC-TL5 cuts both equipment and life-cycle consumption / transportation / maintenance cost compared to the traditional fuel generator lighting tower

COST



High Elongation Ratio For Easy Storage And Transport

5.3m

4.2m


1.2m

1.3m




Unique Cloud-Axis Electric Telescopic Pole

Original mechanical structure that maximizes weight reduction while maintaining stability.

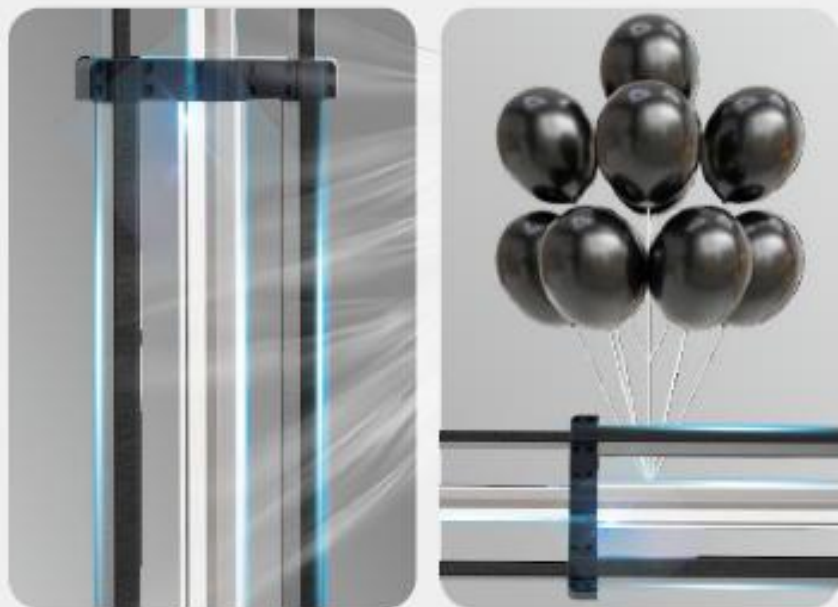

IP65, resistant to 8-level winds, corrosion-resistant, available in most climates.

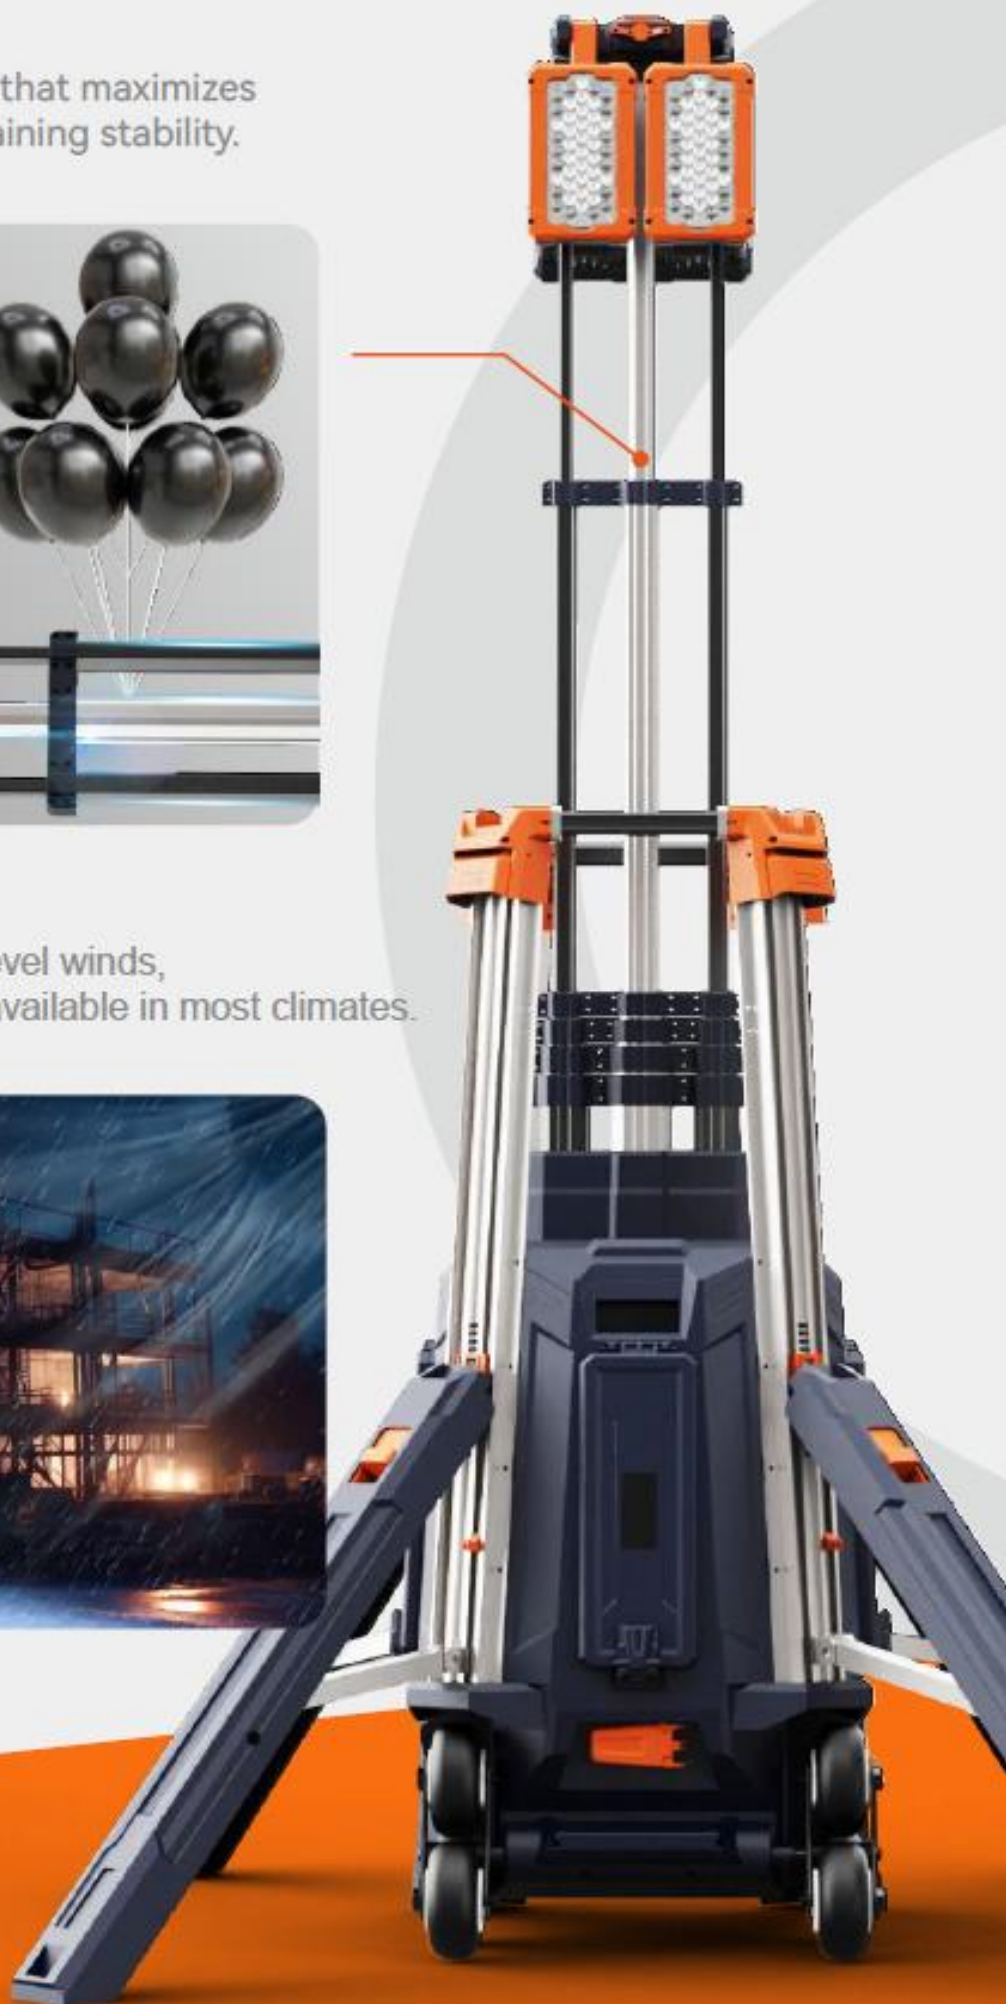

Each lamp head can be adjusted freely.

Unidirectional
Multi-Point Lighting



360° Lighting with
Adjustable Coverage



180° rotation around the
shared X-axis of the two
modules



360° rotation around
the X-axis



180° rotation
around the Y-axis



Multi-Level Self-Locking Support Legs

Adapt to all terrains, whether it is steps, slopes or potholes.



Integrated dual-axis level, easily find the balance point



Unique Coaxial 3-Wheel Design



Easy one-person transport on any terrain.



Special slots are compatible with small warning lights.



A handle that provides the best grip doubles as lift point.




Climbs heights without a forklift if necessary.



Stays stable on muddy ground with maximum contact surface.

Wading depth up to 10cm refers to the water line mark on the light tower body.

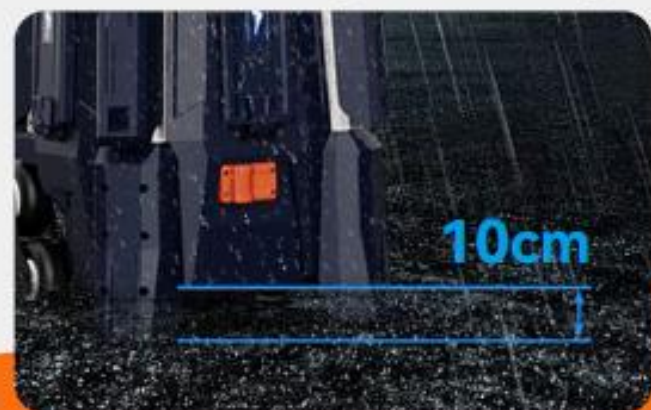

Humanized Design Hidden In The Details

Handheld controller

With spring wire, no need to bend over to operate.



Multifunctional storage space design



Equipped with multiple interfaces to charge devices.

Waterproof toolbox.

Didn't change the battery in time? Don't worry.

Disengage the clutch, then manually retract the pole.



Ultra-Long Working Hours



D24-500 (3Kg)

Portable lithium battery with large capacity in a small size



With 3 of fully charged battery power alone, it can provide 10-100 hours lighting.



X3

It also supports using an AC driver for direct power connection.



High-Efficiency LED Light Source

Free switching of multiple angles.



4.2M
Battery-powered
Up To **33,000LM**

5.3M
Battery-powered
Up To **35,000LM**

4 Levels of Brightness (Battery Powered)

Eco Balanced Standard Turbo



5.3M 3,000LM 10,000LM 18,000LM 35,000LM

4.2M 2,800LM 9,500LM 17,000LM 33,000LM

The brightness and battery level can be viewed on the controller when using batteries.



4.2M
AC Powered
Up To **62,000LM**

5.3M
AC Powered
Up To **65,000LM**

Stepless Dimmable (AC Powered)

Stepless dimming possible



When AC powered, knob on driver controls 0-100% dimming.



Optional Accessories

A variety of accessories are available to expand the power supply options.



Charger



Battery



Driver – AC100-277V Input



TKC-9H

FS8-200

Bay Charger Case +
Solar Panel



One-Person Operation

Only one operator is needed to transport, deploy, and adjust lighting.



Construction



Mining



Emergency



Sport



Firefighting



Event

The total light tower weight is
(excluding battery pack).

50 kg (4.2m) **52 kg** (5.3m)

For quick deployment in emergencies
this equipment fits easily into standard
SUVs for single-person loading. *



* Proper securing and part locking are crucial during transport. Two or more people are required for lifting unless a forklift is available.

Parameter


MLGC-TL5 4.2 m

Height	4.2m
Weight	50Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	Batt 0 - 33,000Lm / AC 0-62,000Lm
Run Times	> 20 hrs (Standard mode, MLGC-BP2 x3)
IP Grade	IP65
Output(USB)	Type-A (5V 2A) & Type-C (5V 2A)
Battery System	MLGC-BP2

MLGC-TL5 5.3 m



Height	5.3m
Weight	52Kg (Fitting only)
Power Supply	Battery / AC 100-277V
Lumens	Batt 0 - 35,000Lm / AC 0-65,000Lm
Run Times	> 20 hrs (Standard mode, MLGC-BP2 x3)
IP Grade	IP65
Output(USB)	Type-A (5V 2A) & Type-C (5V 2A)
Battery System	MLGC-BP2

Size (cm)

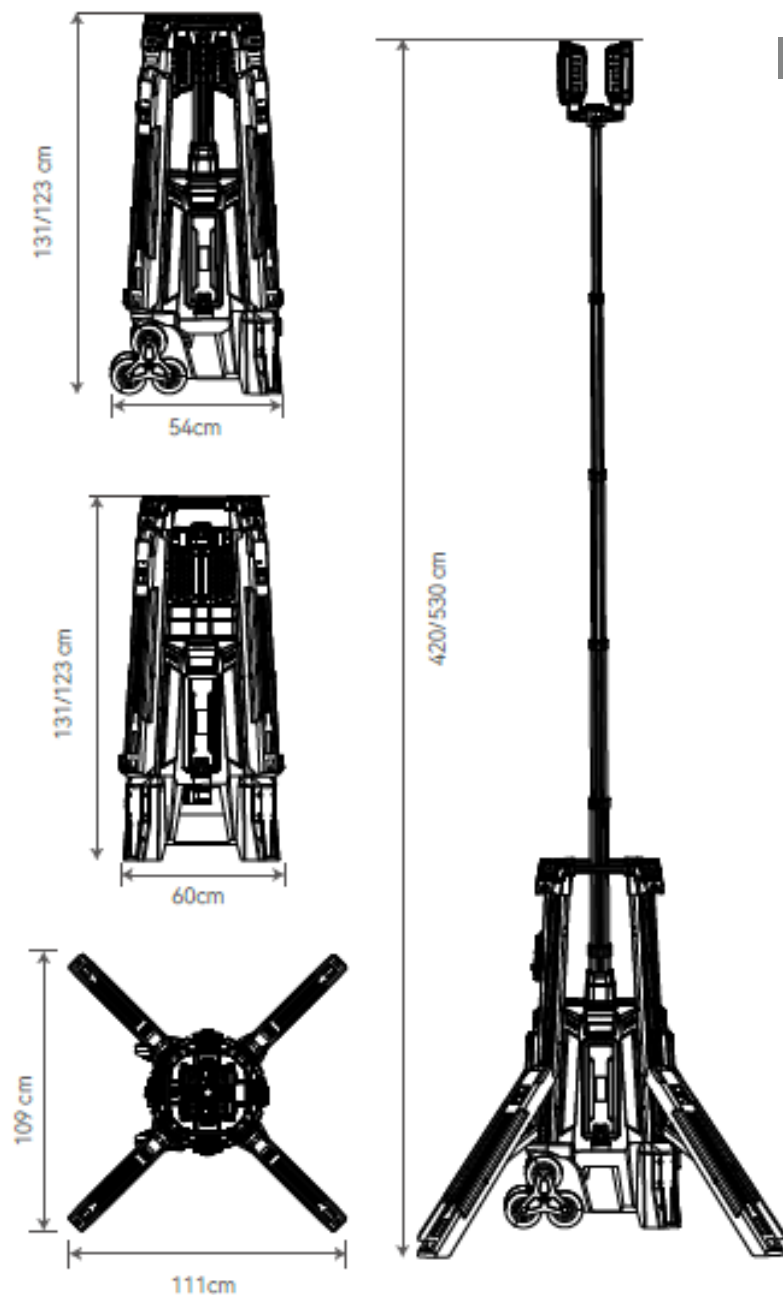


Package

Model	Size	Weight
MLGC-TL5 4.2m	640x640x1365mm	63 kg
MLGC-TL5 5.3m	640x640x1365mm	65 kg

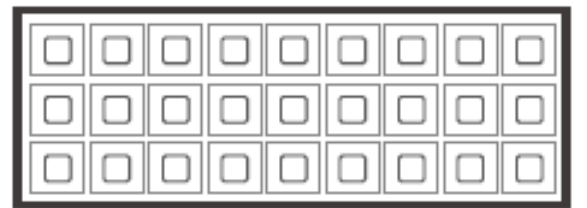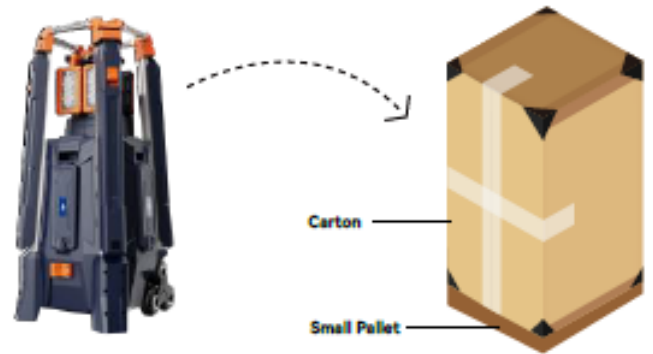

20GP Container 27 Unit

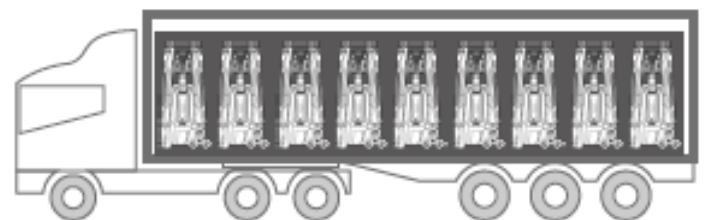

40GP Container 54 Unit

MERLIN EQUIPMENT PTE LTD

69B Tuas Bay Drive, Singapore 636827

Tel: +65 6863 1753

Email: sales@merlinequip.com